LaneGard 3™

FOLDING TYPE III BARRICADE

One-piece design sets up and tears down in seconds.

PSS
Innovations for Safety™

FHWA Acceptance Letter: WZ-336

Tested to Manual for Assessing Safety Hardware (MASH) Guidelines, Test Level 3

Shown with 6' PSS Wave Centerboards. Some assembly required!

Folds for storage and transport, unfolds for use.

One person can easily fold and unfold LaneGard 3.

LaneGard 3 shown folded, with PSS Wave Centerboards attached.

LaneGard 3™

FEATURES AND SPECIFICATIONS

Innovations for Safety™

LaneGard 3 Upright Features:

- LaneGard 3 folds for transport and storage, with PSS Wave Centerboards attached. Unfolds for deployment.
- Made from engineered plastic with UV inhibitors.
- Weighs 17 lbs. assembled, without cernterboards.
- Molded-in Warning Light Mount accepts LED Type A and C Warning Lights.
- Molded through-holes recessed for flush-mounted hardware.
- Designed for use with PSS Wave Centerboards.
- Wave Centerboard available in 4', 6', 8' lengths.
- Retroreflective sheeting available in Engineer, Hi-Intensity and Diamond Grades.
- Retroreflective sheeting meets all state and federal specifications. Available in Engineer, Hi-Intensity and Diamond grades.

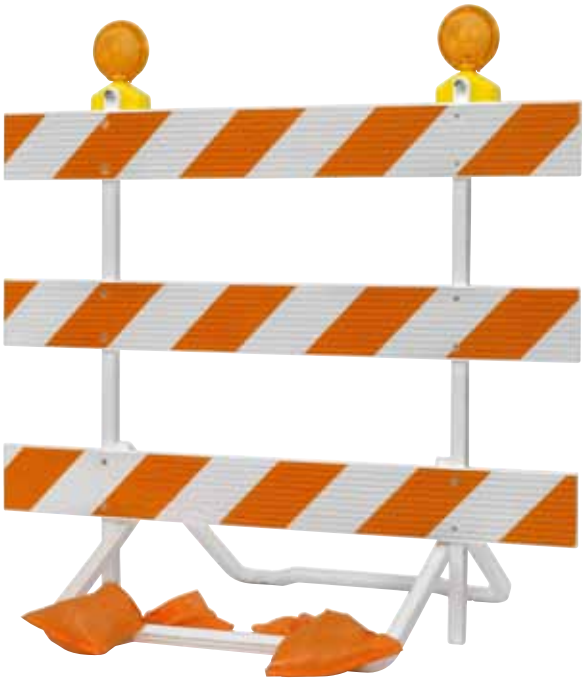

Accepts Type A and C LED Warning Lights.

Measures less than 3" thick when folded for transport or storage.

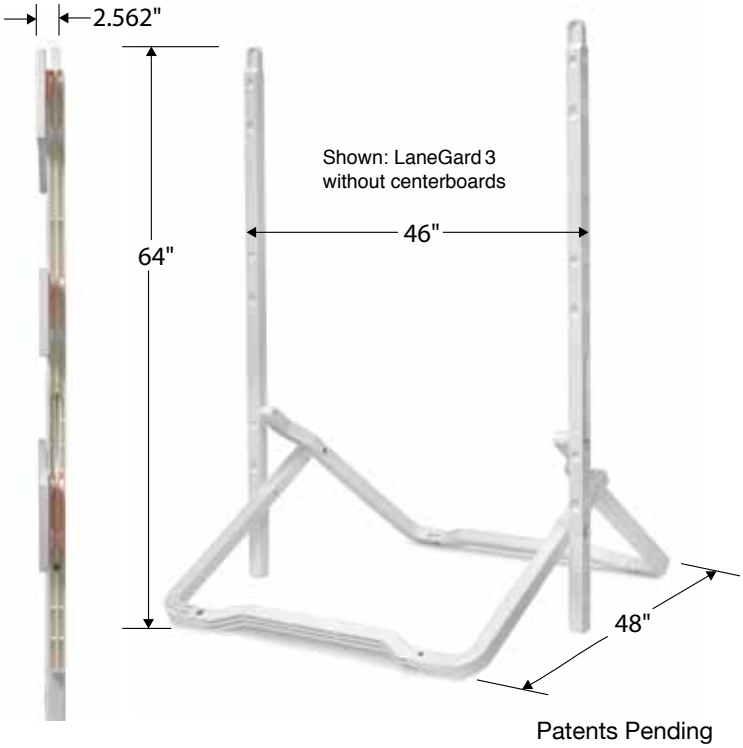

Patents Pending

LaneGard 3 Upright fits Anchor Base for Steel Uprights

Replaces PSST Uprights!

For Anchor Base features see pages 6 and 7 of the Type III Barricade Systems Product Guide.

3M We use 3M Reflective Sheeting.